

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005581 A1

- (51) International Patent Classification⁷: **C23C 28/02**
- (21) International Application Number:
PCT/EP2003/007141
- (22) International Filing Date: 3 July 2003 (03.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02015282.3 9 July 2002 (09.07.2002) EP
- (71) Applicant (*for all designated States except US*):
SIEMENS AKTIENGESELLSCHAFT [DE/DE];
Wittelsbacherplatz 2, 80333 München (DE).
- (71) Applicant (*for AT, BE, BG, CH, CN, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, JP, LU, MC, NL, PT, RO, SE, SI, SK, TR only*): **FORSCHUNGSZENTRUM JÜLICH GMBH** [DE/DE]; Leo-Brandt-Strasse, 52428 Jülich (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **STAMM, Werner** [DE/DE]; Kahlenberg 18, 45481 Mülheim an der Ruhr (DE). **QUADAKKERS, Willem, J.** [NL/NL]; Zinkenstraat 4A, NL-6363 EG Wiinandsrade (NL).
- (74) Common Representative: **SIEMENS AKTIENGESELLSCHAFT**; Postfach 22 16 34, 80506 München (DE).
- (81) Designated States (*national*): CN, JP, US.
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **HIGHLY OXIDATION RESISTANT COMPONENT**

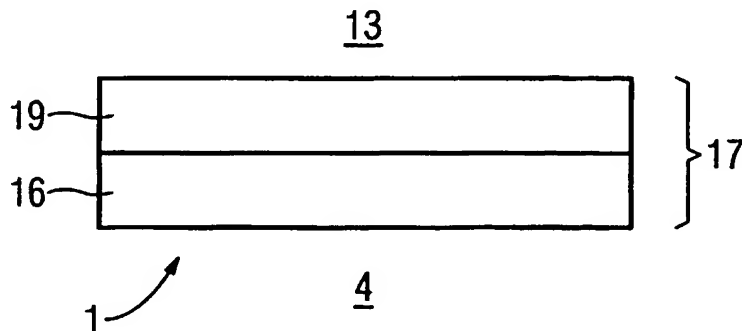

(57) Abstract: An oxidation resistant component (1) is disclosed comprising a substrate (4) and a protective layer (17). The protective layer (17) consists of an inner MCrAlY layer (16) contiguous with the substrate and an outer layer (19) consisting at least of Ni and Al and having a β -NiAl structure.

Highly oxidation resistant component

Field of the invention

5

This invention relates to a component, especially a blade or vane of a gas turbine, with a high oxidation resistance.

10 Background of the invention

Metallic components, which are exposed to high temperature must be protected against heat and corrosion.

15 Especially for gas turbines with its combustion chamber or its turbine blades or vanes it is common to protect the components with an intermediate, protective MCrAlY layer (M= Fe, Co, Ni), which provides oxidation resistance, and a ceramic thermal barrier coating, which protects the substrate
20 of the metallic component against the heat.

An aluminium oxide layer is formed between the MCrAlY- and the thermal barrier coating due to oxidation.

25 For a long life term of a coated component it is required to have a good connection between the MCrAlY layer and the thermal barrier coating, which is provided by the bonding of the thermal barrier coating and the oxide layer onto the MCrAlY layer.

30

If a thermal mismatch between the two interconnecting layers prevails or if the ceramic layer has no good bonding to the aluminium oxide layer formed on the MCrAlY layer, spallation of the thermal barrier coating will occur.

35

From the US-PS 6,287,644 a continuously graded MCrAlY bond coat is known which has an continuously increasing amount of

Chromium, Silicon or Zirconium with increasing distance from the underlying substrate in order to reduce the thermal mismatch between the bond coat and the thermal barrier coating by adjusting the coefficient of thermal expansion.

5

The US-PS 5,792,521 shows a multi-layered thermal barrier coating.

10

The US-PS 5,514,482 discloses a thermal barrier coating system for superalloy components which eliminates the MCrAlY layer by using an aluminide coating layer such as NiAl, which must have a sufficiently high thickness in order to obtain its desired properties. Similar is known from the US-PS 6,255,001.

15

The NiAl layer has the disadvantage, that it is very brittle which leads to early spallation of the onlaying thermal barrier coating.

20

The EP 1 082 216 B1 shows an MCrAlY layer having the γ -phase at its outer layer. But the aluminium content is high and this γ -phase of the outer layer is only obtained by re-melting or depositing from a liquid phase in an expensive way, because additional equipment is needed for the process of re-melting or coating with liquid phase.

25

Summary of the invention

30

In accordance with the foregoing is an object of the invention to describe a protective layer with a good oxidation resistance and also with a good bonding to the thermal barrier coating.

35

The task of the invention is solved by a protective layer which has one underlying conventional MCrAlY layer on which

different compositions of MCrAlY and/or other compositions are present as an outer layer.

One possibility is that the outer layer zone has a composition chosen such that it possesses the β -NiAl-structure.

Especially the MCrAlY layer, which consists of γ -Ni solid solution, is chosen such, that the material of the MCrAlY-layer can be applied e.g. by plasma-spraying. This has the advantage that the outer layer can be deposited in the same coating equipment directly after the deposition of the inner layer (MCrAlY) without re-melting the surface in another apparatus.

The protective layer can be a continuously graded, a two layered or a multi-layered coating.

Brief description of the drawings:

Figure 1 shows a heat resistant component as known by state of the art,

Figure 2, 3 examples of an inventive oxidation resistant component.

Detailed description of the invention

The invention may be embodied in many different forms and should not be construed as limited to the illustrated embodiments set forth herein. Rather, these illustrated embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

Figure 1 shows a heat resistant component as known by state of the art.

The highly oxidation resistant component has a substrate 4, a
5 MCrAlY layer 7 on the substrate, on which a thermally grown oxide layer 10 (TGO) is formed or applied and finally an outer thermal barrier coating 13.

10 Figure 2 shows an highly oxidation resistant component 1 according the invention.

The component 1 can be a part of gas turbine, especially a turbine blade or vane or heat shield.

The substrate 4 is metallic, e.g. a super alloy (Ni-Al-based,
15 e.g.) .

On the substrate 4 the MCrAlY layer zone 16 is a conventional MCrAlY layer 16 of the type e.g. NiCoCrAlY with a typical composition (in wt%) 10% - 50% Cobalt (Co), 10% - 40% Chromium
20 (Cr), 6% - 15% Aluminium (Al), 0,02% - 0,5% Yttrium (Y) and Nickel (Ni) as base or balance.

This MCrAlY layer 16 may contain further elements such as:
0,1% - 2% Silicon (Si), 0,2% - 8% Tantalum (Ta), 0,2% - 5%
25 Rhenium (Re).

Instead at least a part of Yttrium or in addition this MCrAlY layer zone 16 can also contain Hafnium (Hf) and/or Zirconium (Zr) and/or Lanthanum (La) and/or Cerium (Ce) or other
30 elements of the Lanthanide group.

The thickness of this conventional layer 16 is in the range from 100 to 500 micrometer and is applied by plasma spraying (VPS, APS) or other conventional coating methods.

In this example the inventive highly oxidation resistant component 1 reveals a MCrAlY layer 16 with another outer layer zone 19 on top, which forms together with the layer zone 16 the protective layer 17.

5 For example, the outer layer zone 19 consists of the phase β -NiAl. The thickness of this layer 19 is in the range between 1 and 75 micrometer, especially up to 50 micrometer. The disadvantage of brittleness of the β -NiAl phase is overcome by the fact that the β -NiAl layer 19 is thin
10 compared to the MCrAlY layer 16.

The outer layer 19 can solely consist of the two elements Ni and Al. The concentration of these two elements is given by the binary phase diagram Ni-Al and must be chosen in such a
15 way that the outer layer 19 consists of pure β -NiAl phase at the temperature at which the oxidation of the layer 19, which forms the TGO 10, occurs (21-37wt% Al or 32-50at% Al).

Nevertheless this β -NiAl phase can contain further alloying
20 elements as long as these elements do not destroy the phase β -NiAl phase structure. Examples of such alloying elements are chromium and/or cobalt. The maximum concentration of chromium is given by the area of the β -phase in the ternary phase diagram Ni-Al-Cr at the relevant temperatures.
25 Cobalt has a high solubility in the β -NiAl phase and can nearly completely replace the nickel in the NiAl-phase.

Similar further alloying elements can be chosen such as Si (Silicon), Re (Rhenium), Ta (Tantal).

30 The main requirement of the concentration of the alloying elements is, that it does not lead to the development of new multi-phase microstructures.

Also elements (additions) such as Hafnium, Zirconium,
35 Lanthanum, Cerium or other elements of the Lanthanide group, which are frequently added to improve the properties of MCrAlY coatings, can be added to the β -phase layer.

The NiAl based layer is applied by plasma spraying (VPS, APS) and/or other conventional coating methods.

- 5 The advantage of the β -NiAl phase structure is that a meta-stable aluminium oxide (θ - or a mixture with γ -phase) is formed in the beginning of the oxidation of the layer 19.

10 The TGO (e.g. aluminium oxide layer) 10 which is formed or applied on the outer layer 19 has a desirable needle like structure and leads therefore to a good anchoring between the TGO 10 and the ceramic thermal barrier coating 13.

15 On conventional MCrAlY coatings, usually the stable α -phase of aluminium oxide is formed upon high temperatures exposure of the coating. However during the use of the heat resistant component 1 with its outer layer 19 meta-stable aluminium oxide 10 is allowed to be transformed into the stable α -phase during high temperature exposure, which leads to a
20 desirable microporosity in the TGO.

Another possibility of a component 1 according to the invention is given in such a way that the standard MCrAlY layer 16 is of the type NiCoCrAlY and has an amount of
25 aluminium between 8% to 14 wt% with a thickness from 50 to 600 micrometer, especially between 100 and 300 micrometer.

On this MCrAlY layer 16 a second MCrAlY layer zone 19 of the type NiCoCrAlY is applied. The composition of this second
30 layer is chosen in such a way that the modified MCrAlY layer 19 as outer layer 19 shows at a high application temperature (900° - 1100°C) a pure γ -Ni matrix. A suitable composition of the second layer (19) can be derived from the known phase diagrams Ni-Al, Ni-Cr, Co-Al, Co-Cr, Ni-Cr-Al, Co-Cr-Al.

35

Compared to conventional MCrAlY coatings this modified MCrAlY layer 19 has a lower concentration of aluminium with a

concentration of aluminium between 3 - 6.5 wt %, which can easily be applied by plasma spraying by only changing the powder feed of the plasma spraying apparatus accordingly.

- 5 However, layer 19 can also be applied by other conventional coating methods.

A typical composition of this modified MCrAlY layer 19 which consists of γ -phase is: 15 - 40 wt% chromium (Cr), 5 - 80 wt% Cobalt (Co), 3 - 6.5 wt% Aluminium (Al) and Ni base,
10 especially 20 - 30wt% Cr, 10 - 30wt% Co, 5 - 6wt% Al and Ni base.

Instead of Yttrium this MCrAlY layer zone 19 can also contain
15 further additions of so called reactive elements such as Hafnium (Hf) and/or Zirconium (Zr) and/or Lanthanum (La) and/or Cerium (Ce) or other elements of the Lanthanide group, which are commonly used to improve the oxidation properties of MCrAlY coatings.

20 The total concentration of these reactive elements may be in the range between 0,01 and 1 wt%, especially between 0,03 and 0,5 wt %.

25 The thickness of the modified MCrAlY layer 19 is between 1 and 80 micrometer especially between 3 and 20 micrometer. Further alloying elements can be chosen such as Sc (Scandium), Titanium (Ti), Re (Rhenium), Ta (Tantalum), Si (Silicon).

30 A heat treatment prior to applying a thermal barrier coating can be carried out in an atmosphere with a low oxygen partial pressure, especially at 10^{-7} and 10^{-15} bar.

35 The formation of the desired meta-stable aluminium oxide on top of the modified γ -phase based MCrAlY layer 19 can be obtained by oxidation of the modified MCrAlY layer 19 at a

temperature between 850°C and 1000°C prior to deposition of a thermal barrier coating, especially between 875°C and 925°C for 2 - 100 hours, especially between 5 and 15 hours.

- 5 The formation of these meta-stable aluminium oxide during that mentioned oxidation process can be promoted by addition of water vapour (0.2-50vol%, especially 20-50vol%) in the oxidation atmosphere or by the use of an atmosphere with a very low oxygen partial pressure at a temperature between
10 800°C and 1100°C, especially between 850°C and 1050°C. In addition to water vapour the atmosphere can also contain non-oxidizing gases such as nitrogen, argon or helium.

Because the modified MCrAlY layer 19 is thin, aluminium from
15 the inner or standard MCrAlY layer 16 can diffuse through the modified MCrAlY layer 19 in order to support the formation of aluminium oxide on the outer surface of the layer 19 during long term service, which could not be performed by the modified MCrAlY layer 19 alone because of its low
20 concentration of aluminium.

Figure 2 shows a two layered protective layer 17.

- 25 Figure 3 shows a further component 1 with a high oxidation resistance according to the invention.

The concentration of the MCrAlY layer 16 is continuously graded in such a way, that near the substrate 4 the
30 composition of the MCrAlY layer 16 is given by a standard MCrAlY layer 16 as described in figure 2 or 1, and that near the thermal barrier coating 13 the composition of the outer layer 19 shows the composition of the layer 19 as described in figure 2.

On the outer layer zone (19) a thermal barrier coating (TBC) (13) is applied. Due to the good oxidation resistance of the protective layer (17) and the good bonding of the TBC to the TGO (10) due to adjustment of structure, phases and
5 microstructure the life term of the component 1 is prolonged.

claims

1. Highly oxidation resistant component (1),
having a substrate (4),
5 a protective layer (17),
which consists of
an intermediate MCrAlY layer zone (16) on or near the
substrate (4),
wherein M is at least one element out of the group Co,
10 Fe, Ni,
and an outer layer zone (19)
which consists at least of the elements Ni and Al and
possesses the structure of the phase β -NiAl, and
wherein the outer layer zone (19) is onto the
15 intermediate MCrAlY layer zone (16),
whereby the Al content lays in the range between 21wt%
and 37wt%.
- 20 2. Highly oxidation resistant component according to claim
1,
wherein the protective layer (17) consists of two
separated layers (16, 19).
- 25 3. Highly oxidation resistant component according to claim
1,
with a continuously graded concentration of the
composition of the intermediate and outer zone (16, 19)
inside the protective layer (17).
- 30 4. Highly oxidation resistant component according to claim
1,
wherein the outer layer zone (19) is thinner than the
intermediate layer (16) on or near the substrate (4).

5. Highly oxidation resistant component according to claim 1,

wherein the intermediate MCrAlY-layer zone (16) has the composition (in wt%): 10% - 50% Co, 10% - 40% Cr, 6% - 15% Al, 0,02% - 0,5% Y, Ni base.

6. Highly oxidation resistant component according to claim 1,

wherein the intermediate MCrAlY-layer (16) or the outer layer zone (19) contains at least one further element such as (in wt%): 0,1% - 2% Si, 0,2% - 8% Ta or 0,2% - 5% Re.

7. Highly oxidation resistant component according to claim 1,

wherein the Yttrium of MCrAlY of the intermediate MCrAlY zone (16) or the outer zone (19) is added and/or at least partly replaced by at least one element out of the group Hf, Zr, La, Ce and/or other elements of the Lanthanide group.

8. Highly oxidation resistant component according to claim 1, wherein the outer layer zone (19) contains the element chromium.

9. Highly oxidation resistant component according to claim 1, wherein the outer layer zone (19) contains the element cobalt.

10. Highly oxidation resistant component according to claim 1,

wherein the outer zone (19) is added at least one additional element out of the group Hf, Zr, La, Ce or other elements of the Lanthanide group.

11.Highly oxidation resistant component according to claim 10,
wherein the maximum amount of further additions is 1wt%.

5 12.Highly oxidation resistant component according to claim 1,
wherein the MCrAlY layer zone (16,. 19) contains Ti (Titanium) and/or Sc (Scandium).

10 13.Highly oxidation resistant component according to claim 1,
wherein on the outer layer zone (19) a thermal barrier coating (13) is formed.

15 14.Highly oxidation resistant component according to claim 13,
wherein a heat treatment prior to applying a thermal barrier coating is carried out
in an atmosphere with a low oxygen partial pressure,
20 especially at 10^{-7} and 10^{-15} bar.

1/1

FIG 1

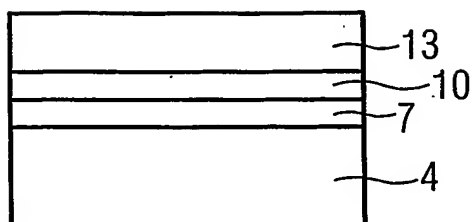


FIG 2


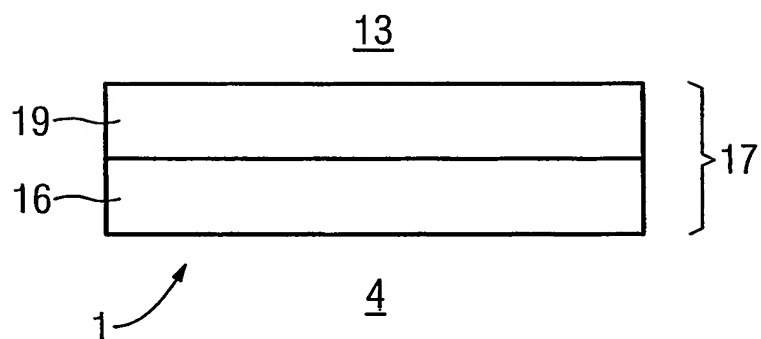


FIG 3

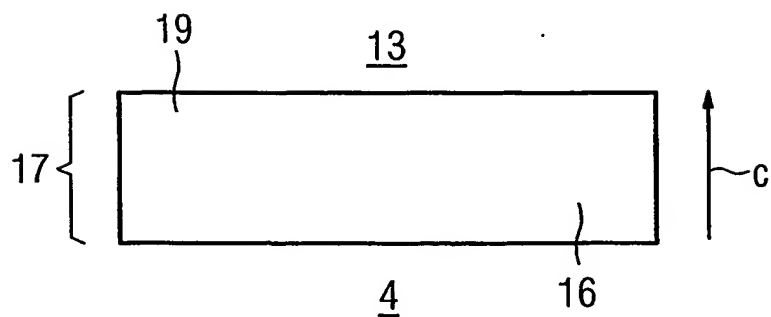

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 03/07141

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C23C28/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 10, 31 October 1997 (1997-10-31) & JP 09 157866 A (MITSUBISHI HEAVY IND LTD), 17 June 1997 (1997-06-17)	1, 2, 5, 8, 9
Y	abstract	1, 3, 6, 7, 10, 11, 13, 14
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the International search

15 October 2003

Date of mailing of the International search report

27/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hintermaier, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/07141

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	SCHMITT-THOMAS K G ET AL: "IMPROVED OXIDATION RESISTANCE OF THERMAL BARRIER COATINGS" SURFACE AND COATINGS TECHNOLOGY, ELSEVIER, AMSTERDAM, NL, vol. 120/121, 1999, pages 84-88, XP001004807 ISSN: 0257-8972 abstract page 85	1
Y	US 5 514 482 A (STRANGMAN THOMAS E) 7 May 1996 (1996-05-07) abstract column 3, line 25 - line 45	1
Y	US 2001/004475 A1 (ALLEN WILLIAM PATRICK ET AL) 21 June 2001 (2001-06-21) paragraph '0030!; figure 4 paragraph '0025!; table 2 claims 1-5,11	6,7
Y	US 6 291 084 B1 (GRYLLS RICHARD JOHN ET AL) 18 September 2001 (2001-09-18) the whole document	10,11, 13,14
Y	EP 1 167 575 A (GEN ELECTRIC) 2 January 2002 (2002-01-02) the whole document	10,11, 13,14
Y	US 6 403 165 B1 (LAU YUK-CHIU ET AL) 11 June 2002 (2002-06-11) the whole document	10,11, 13,14
Y	US 6 001 492 A (JACKSON MELVIN ROBERT ET AL) 14 December 1999 (1999-12-14) abstract column 3, line 11 -column 4, line 51 column 7, line 3 -column 8, line 6	3
A	EP 0 718 419 A (CHROMALLOY UK LTD ;ROLLS ROYCE PLC (GB)) 26 June 1996 (1996-06-26) abstract page 1, line 23 - line 39; figures 2A,,2B page 2, line 7 - line 14 page 11, line 32 - line 47; example 9	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/07141

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 09157866	A	17-06-1997	NONE	
US 5514482	A	07-05-1996	NONE	
US 2001004475	A1	21-06-2001	US 2002130047 A1 EP 1111192 A1 SG 96589 A1 US 2001004474 A1	19-09-2002 27-06-2001 16-06-2003 21-06-2001
US 6291084	B1	18-09-2001	US 6153313 A EP 1167575 A2 EP 0992612 A2 US 6579627 B1	28-11-2000 02-01-2002 12-04-2000 17-06-2003
EP 1167575	A	02-01-2002	US 6291084 B1 EP 1167575 A2	18-09-2001 02-01-2002
US 6403165	B1	11-06-2002	US 2002192496 A1	19-12-2002
US 6001492	A	14-12-1999	NONE	
EP 0718419	A	26-06-1996	AU 695086 B2 AU 4068595 A AU 695087 B2 AU 4068695 A CA 2165641 A1 CA 2165932 A1 DE 69504023 D1 DE 69504023 T2 DE 69509202 D1 DE 69509202 T2 EP 0718419 A2 EP 0718420 A1 JP 8225958 A JP 8225959 A NO 955187 A NO 955188 A US 5645893 A US 5667663 A US 5763107 A US 5981091 A	06-08-1998 04-07-1996 06-08-1998 04-07-1996 25-06-1996 25-06-1996 17-09-1998 10-12-1998 27-05-1999 09-09-1999 26-06-1996 26-06-1996 03-09-1996 03-09-1996 25-06-1996 25-06-1996 08-07-1997 16-09-1997 09-06-1998 09-11-1999